



ONE TOUCH  
THE LIFE STYLE LAMINATE



ONE TOUCH THE LIFE STYLE LAMINATE

oneLine

oneLine

**EDGE IT RIGHT**

Edge band available to ensure seamless finishing.



**KALPSAR LAM PVT. LTD.**

Survey No.: 817, 818, Vill. Ghodasar, Nainpur,  
To Haldarvas Road, Ta. Mahemdabad, Dis. Kheda,  
Gujarat - 387 110 (INDIA)

sales@kalpsar.com | www.kalpsar.com



Scan for E-Catalog

# OUR COLLECTION



## EDGE BAND AVAILABLE

Elevate any space with our edge band laminates, offering durable wear resistance and a stylish finish. It comes in a curated collection of patterns and textures that mimic real wood, stone, or bold solids. The flexible, lightweight edging is easy to apply, delivering a seamless look and reducing installation time. Resistant to moisture and heat, it protects panel edges and maintains color and gloss over time. Ideal for kitchens, wardrobes, and furniture, it delivers a premium appearance.



STAIN  
FREE



LOW  
EMISSION



ANTI  
BACTERIAL



GENUINE  
THICKNESS

 **ONE TOUCH** | THE LIFE STYLE LAMINATE



# OUR COLLECTION



## EDGE BAND AVAILABLE

Elevate any space with our edge band laminates, offering durable wear resistance and a stylish finish. It comes in a curated collection of patterns and textures that mimic real wood, stone, or bold solids. The flexible, lightweight edging is easy to apply, delivering a seamless look and reducing installation time. Resistant to moisture and heat, it protects panel edges and maintains color and gloss over time. Ideal for kitchens, wardrobes, and furniture, it delivers a premium appearance.



STAIN  
FREE



LOW  
EMISSION



ANTI  
BACTERIAL




GENUINE  
THICKNESS


# oneLine

# OUR COLLECTION


WOOD

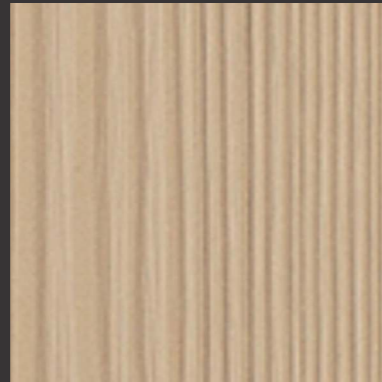


LEATHER

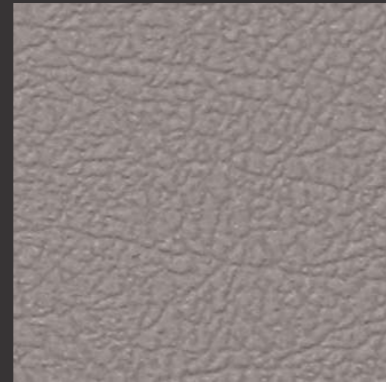

SOLID



FABRIC

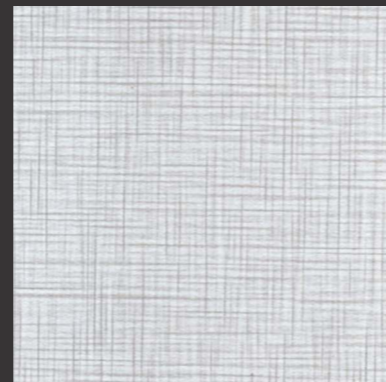

## FEATURES



EASY TO CLEAN



UV STABLE  
INDOOR USE



FIRE RATING



DURABLE



STAIN RESISTANT



VERTICAL  
APPLICATION



HORIZONTAL  
APPLICATION



100%  
PHENOLIC  
LAMINATES

Elevate any space with our premium collection. Offering superior wear resistance and a wide range of patterns and textures, from solids to wood, leather, and fabric. The flexible, seamless look and reducing installation time. Resistant to moisture and heat, it protects panel edges and maintains color and gloss over time. Ideal for kitchens, wardrobes, and furniture, it delivers a premium appearance.



ANTI  
BACTERIAL



GENUINE  
THICKNESS

# OUR COLLECTION

## EDGE BAND

Strong Edges For Stylish Spaces

### SPECIFICATION

Thickness : 0.8 mm

Roll Size : 50 Mtr

Width : 22 mm



Elevate any space with  
wear resistance and  
of patterns and textures  
solids. The flexible,

seamless look and reducing installation time. Resistant to moisture and heat, it protects panel edges and maintains color and gloss over time. Ideal for kitchens, wardrobes, and furniture, it delivers a premium appearance.



ANTI BACTERIAL



GENUINE THICKNESS

 **ONE TOUCH** | THE LIFE STYLE LAMINATE





one|line

# LEATHER & PLAIN COLOR

## COLLECTION

Leather and plain color collections offer a textured leather-look with authentic grain and tactile feel; a solid/plain color feel delivering uniform hues and clean, modern aesthetics; and a hybrid pattern that combines subtle leather textures with harmonious color options for versatile design. These textures cover furniture, panels, and interiors, balancing luxury feel, simplicity, and versatility.



FERVOR OF FASCINATION

# LEATHER



198 LT

198 LT

PR+



80x105 mm

136 LT

136 LT

PR+



112 LT

112 LT

PR+



123 LT

123 LT

PR+



124 LT


PR+



128 LT


128 LT

PR+

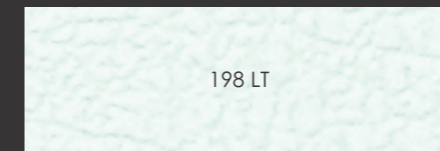


198 LT

EB 198 LT

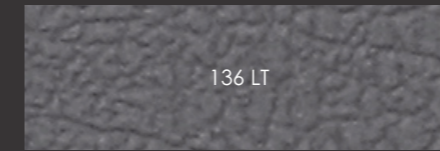


136 LT

EB 136 LT

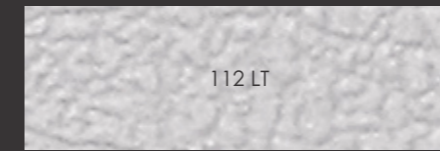


112 LT

EB 112 LT

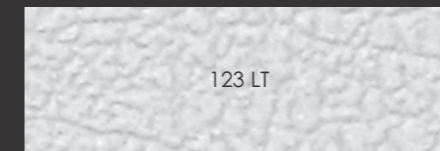


123 LT

EB 123 LT

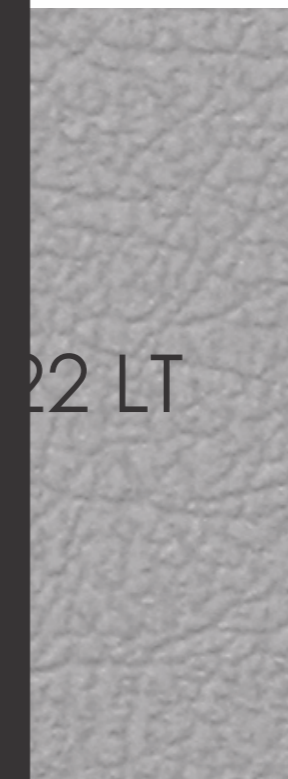

122 LT

PR+

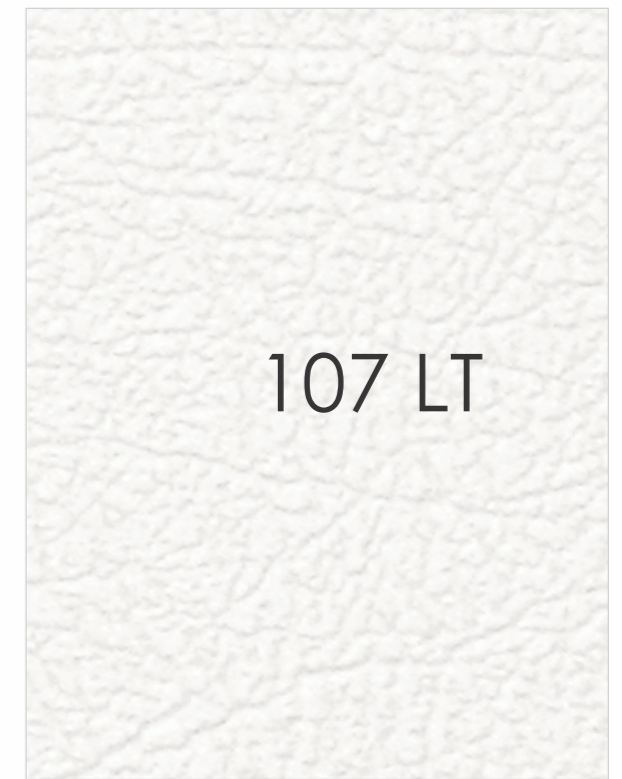

107 LT

107 LT

PR+

# LEATHER



198 LT

198 LT

PR+



80x105 mm

136 LT

136 LT



112 LT

112 LT

PR+



123 LT

123 LT



124 LT

EB 124 LT

128 LT

EB 128 LT

122 LT

EB 122 LT

107 LT

EB 107 LT



124 LT

124 LT

PR+



128 LT

128 LT

PR+



122 LT

122 LT

PR+




107 LT

107 LT

PR+

# PLAIN - SUEDE

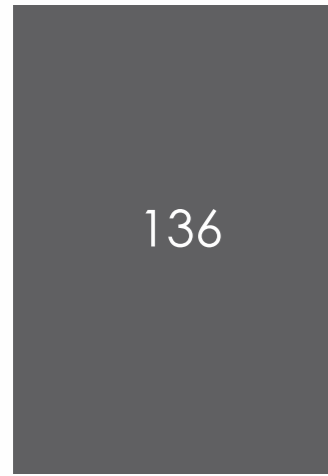

136

136 SF PR



45x65 mm

112

112 SF PR



123

123 SF PR



198

198 SF PR




124

124 SF PR



122

122 SF PR

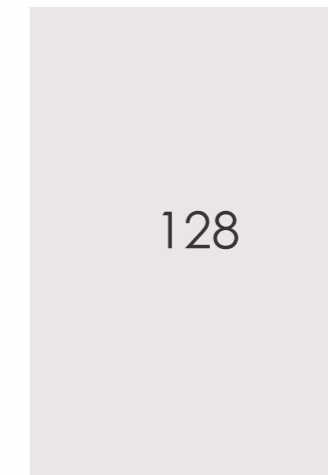


128

128 SF PR




107

107 SF PR




136

EB 136

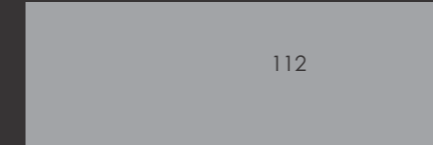


112

EB 112

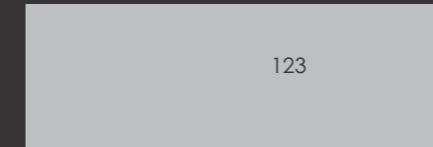



123

EB 123




198

EB 198

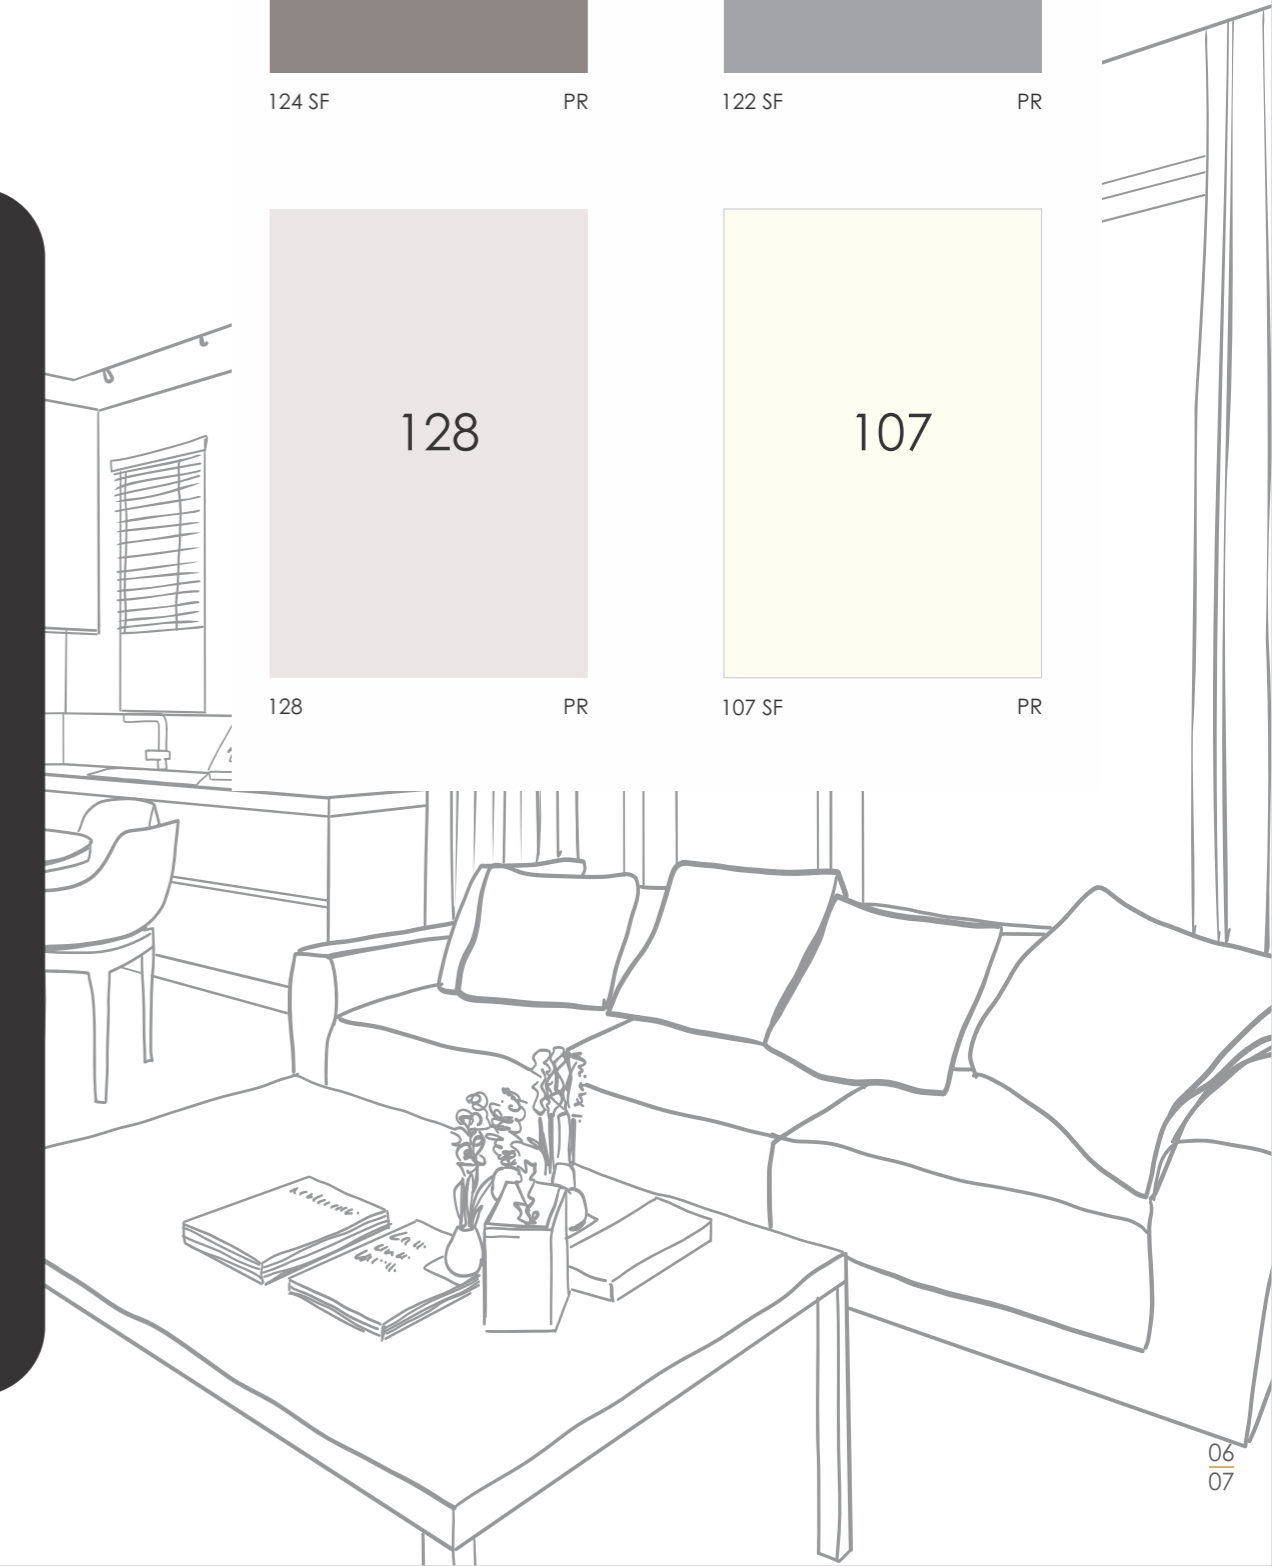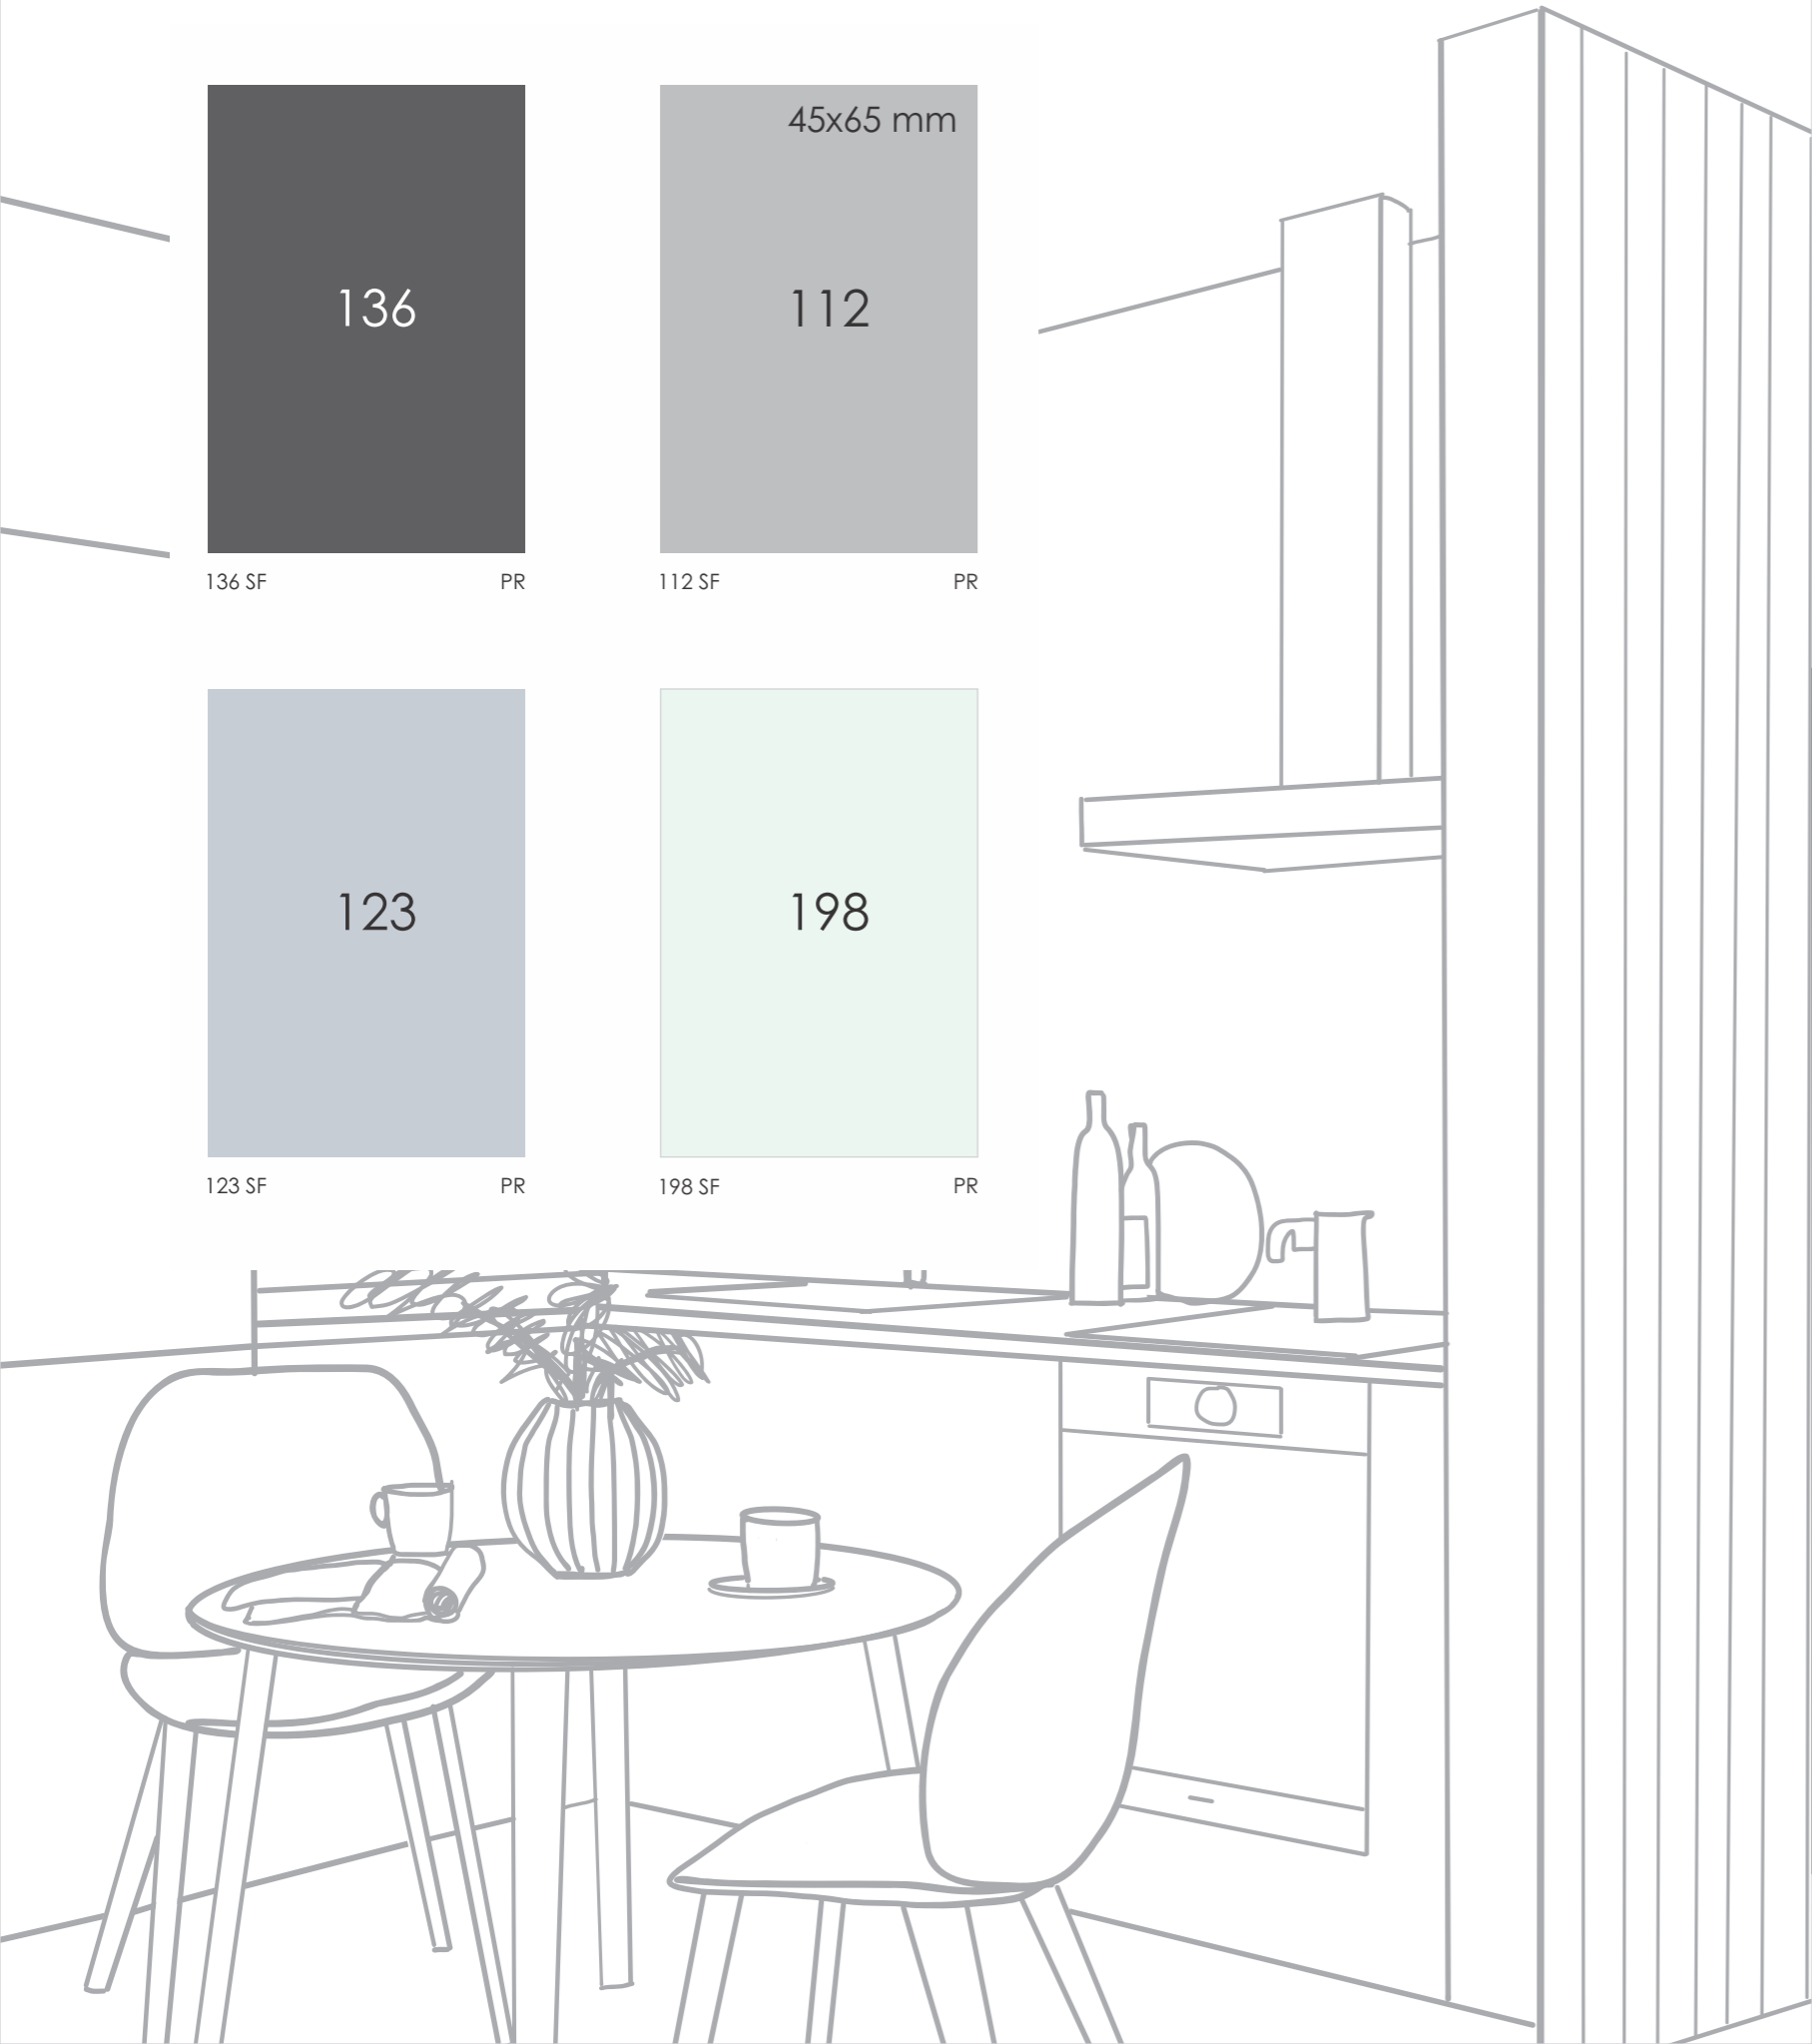

# PLAIN - SUEDE

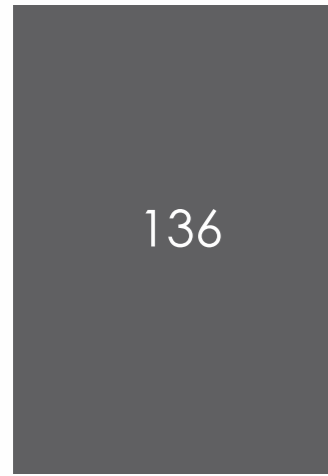

136

136 SF PR



112

112 SF PR



123

123 SF PR




198

198 SF PR




124

124 SF PR

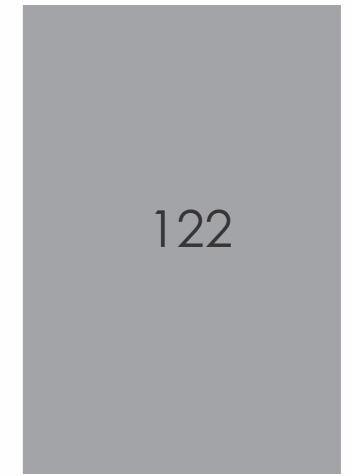

122

122 SF PR

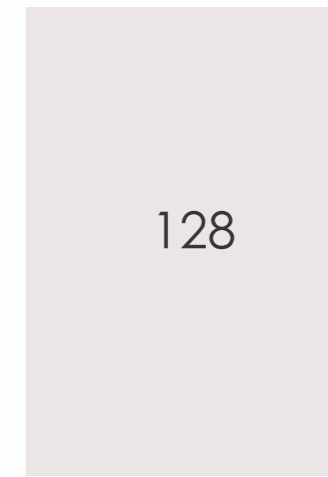

128

128 PR



107

107 SF PR



124

EB 124

122

EB 122


128

EB 128


107

EB 107



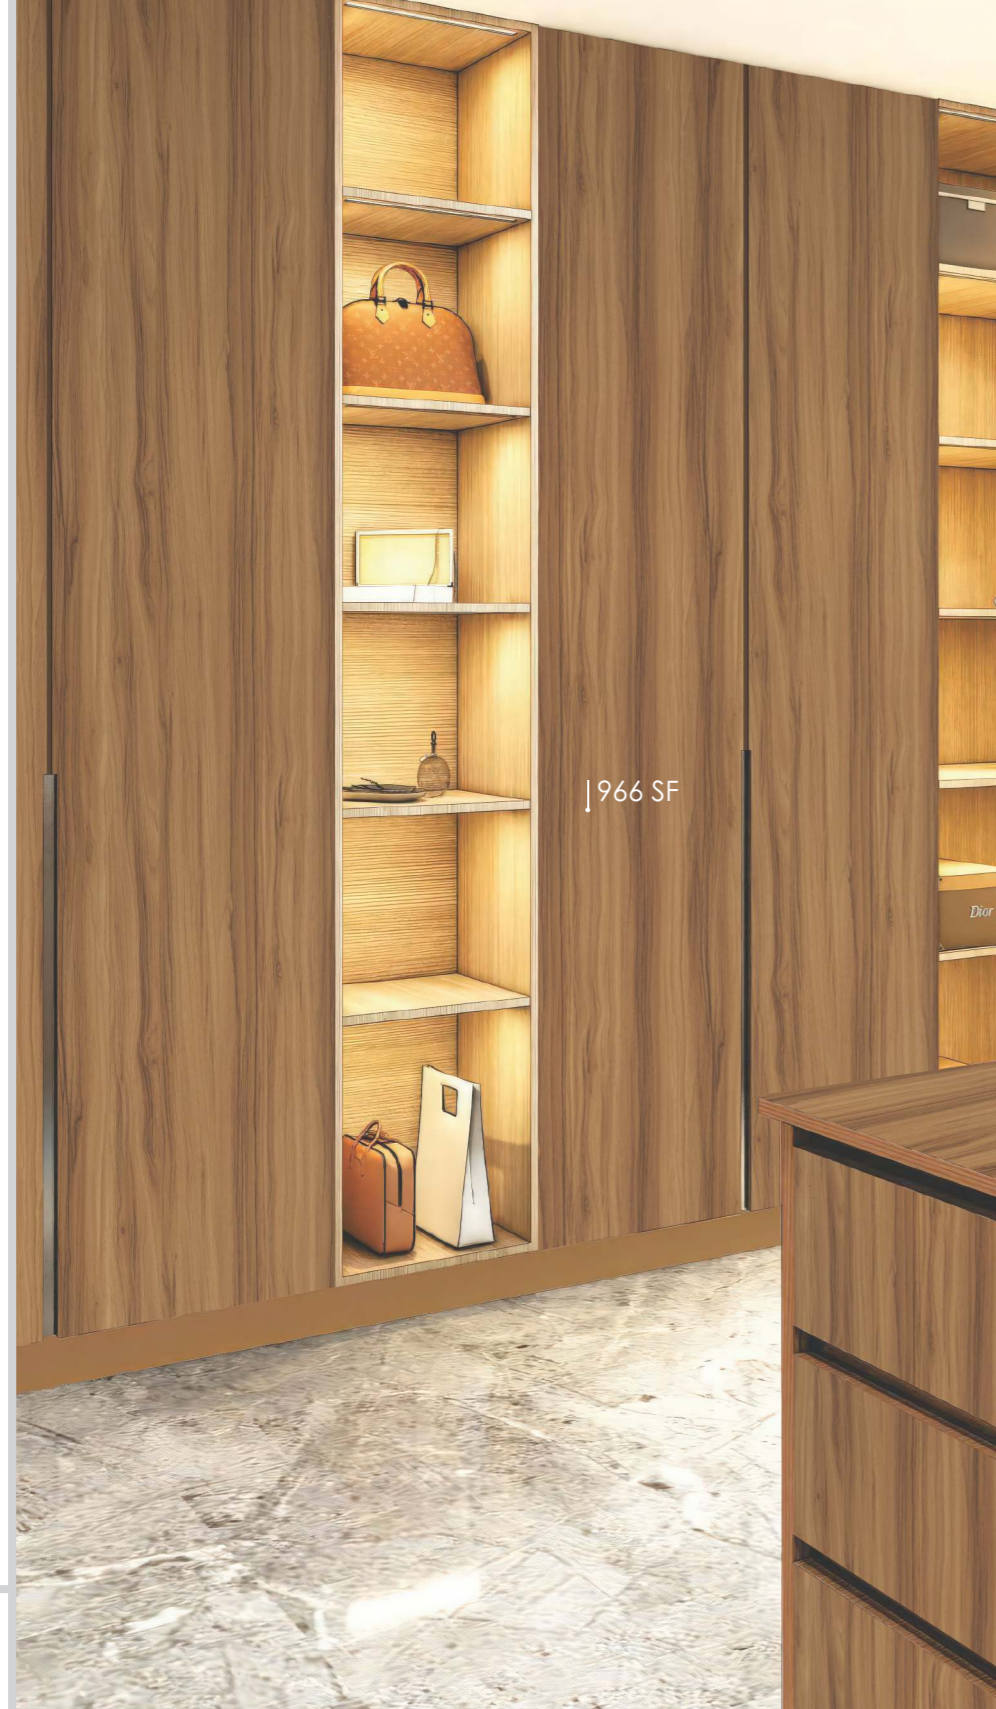

DESIGN THAT INSPIRES.

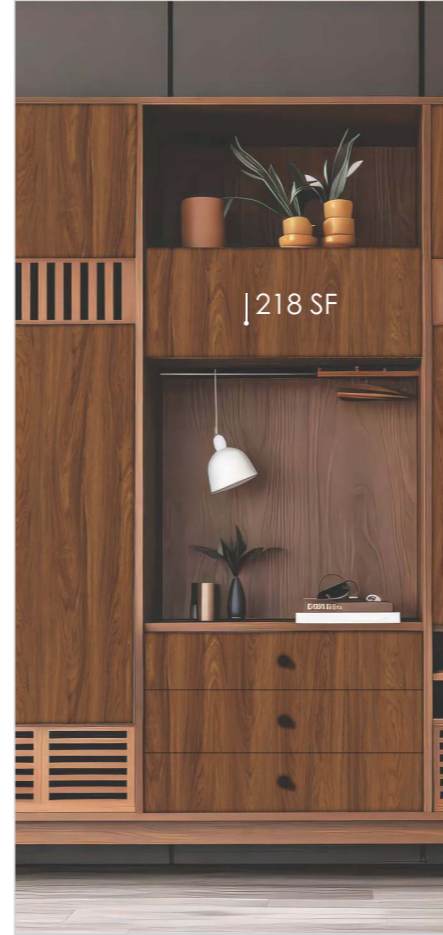

one|line

# WOOD

COLLECTION

Wood collection in laminates offers decorative surfaces that recreate natural grain with authentic texture; a performance line engineered for durability, moisture resistance, and scratch protection; and an eco line focused on sustainable sourcing and low VOCs. These options suit cabinetry, furniture, walls, and flooring with varied aesthetics and resilience.




# WOOD

Laminates that  
add character to  
everyday spaces.




# WOOD

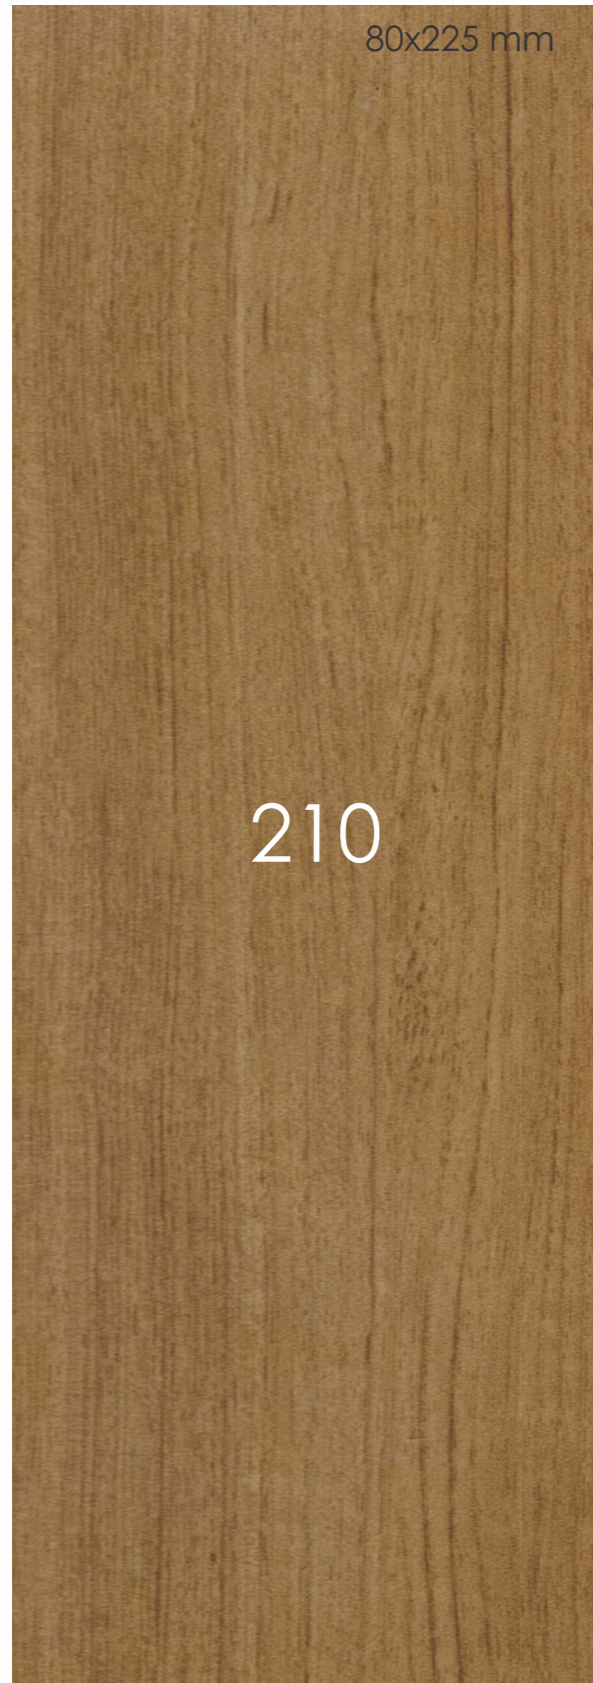


210 SF



Laminates that add character to everyday spaces.

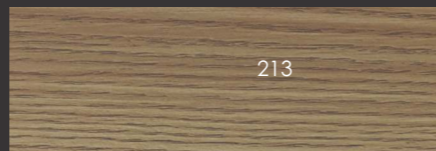

EB 213

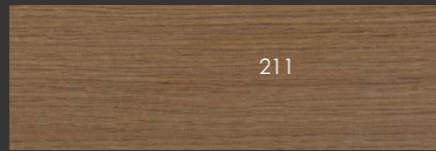

EB 211

## Lavish

Thoughtfully designed for refined interiors.



213 SF



211 SF



# WOOD




80x225 mm

993

993 SF



Crafted to endure daily use.

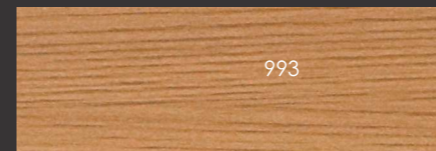

993

EB 993

## Versatile

Textures that enhance ambience with sophistication.

14



267

267 SF




# WOOD




993 SF



Crafted to endure daily use.

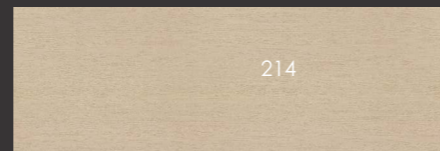

EB 214

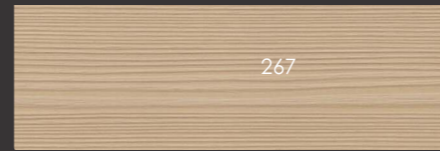

EB 267

## Exemplary

Style that stands strong over time.



214 SF



267 SF







80x225 mm

218

218 SF



Inspired by global design trends.

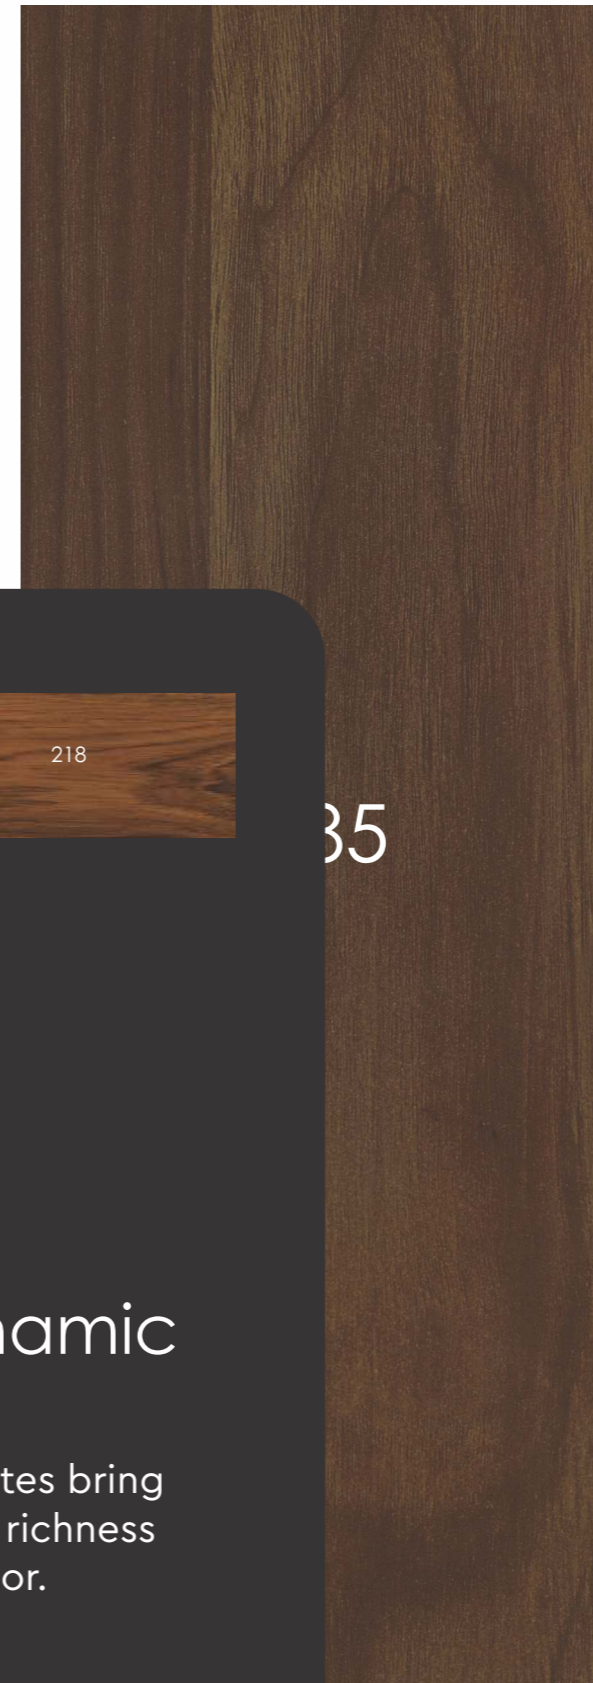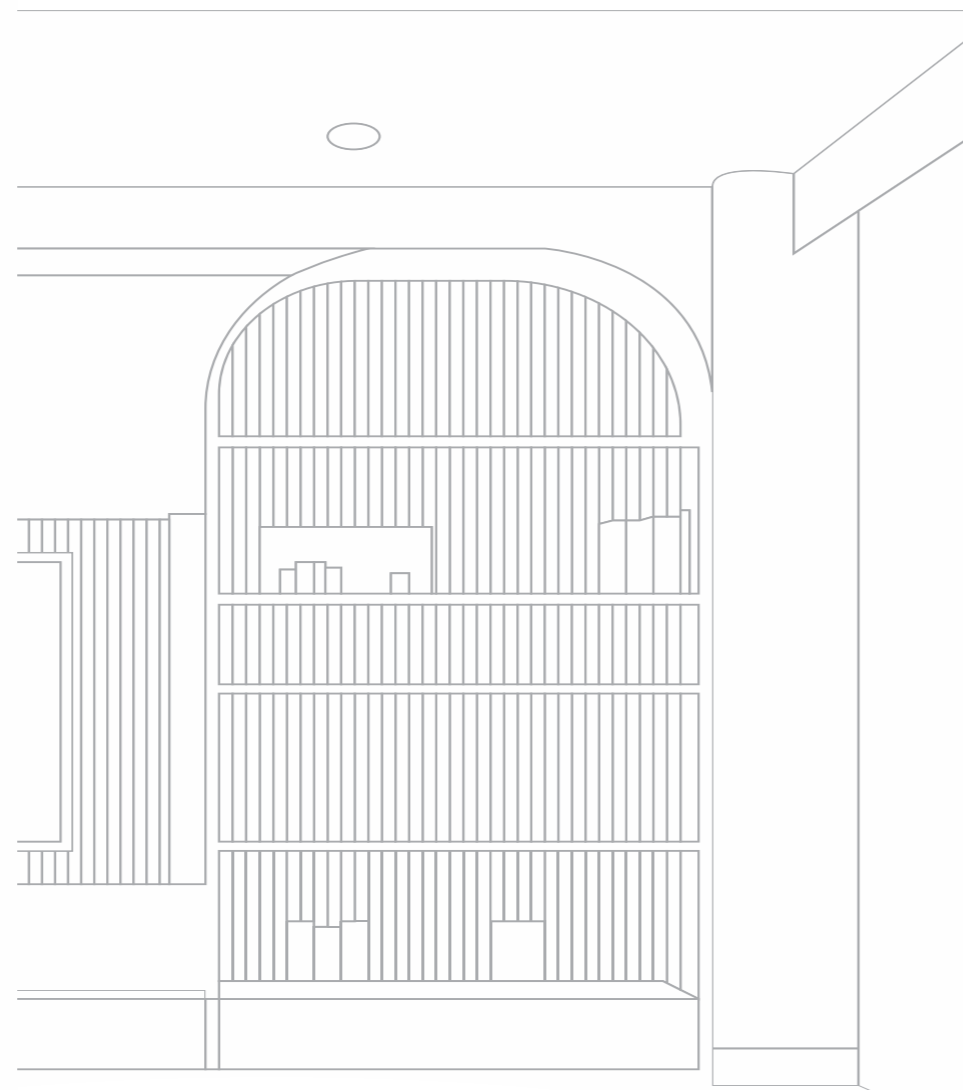

218

35

EB 218

### Dynamic

These laminates bring subtle richness to décor.



966

966 SF







218 SF



Inspired by  
global design  
trends.

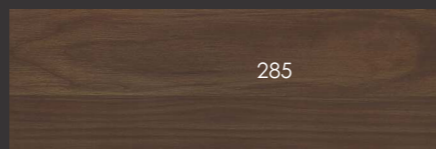

EB 285

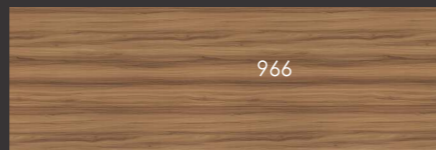

EB 966

### Alluring

Surfaces that  
enhance  
interiors with  
timeless charm.



985 SF



966 SF



APPEARANCE THAT IMPRESSES



Fabric finish laminates come in three core types: decorative aesthetics with soft-touch textile looks; a performance line for high durability and stain/abrasion resistance; and a sustainable line with low VOCs and recycled or bio-based content. They suit furniture, walls, hospitality, and healthcare, balancing beauty, longevity, and eco-friendliness.



**FABRIC**  
COLLECTION

one|line

# FABRIC




266 SF



236 SF




EB 266

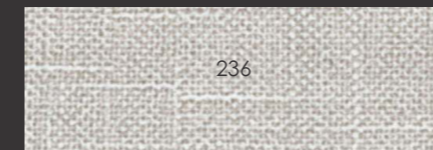

EB 236



278 SF

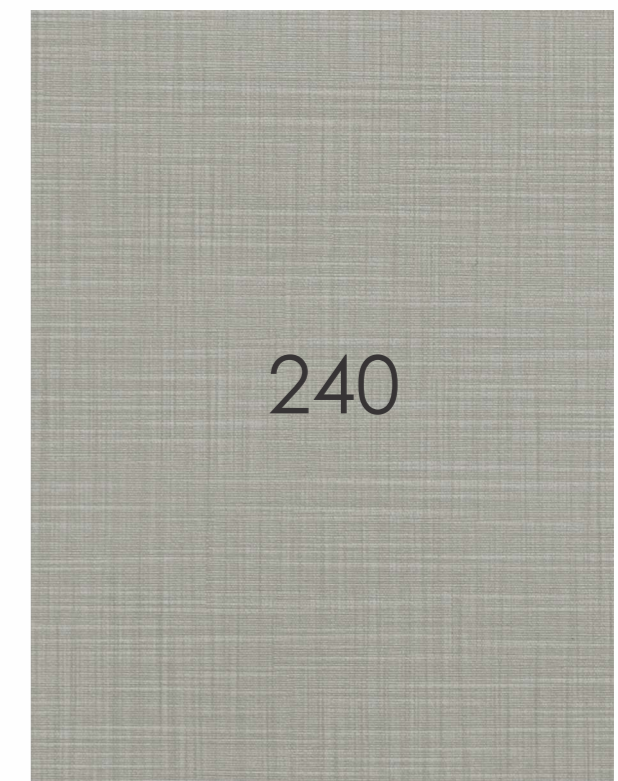

240 SF

Enhanced fervor



Outstanding

Feel a flamboyant design verve.



# FABRIC



266 SF



236 SF

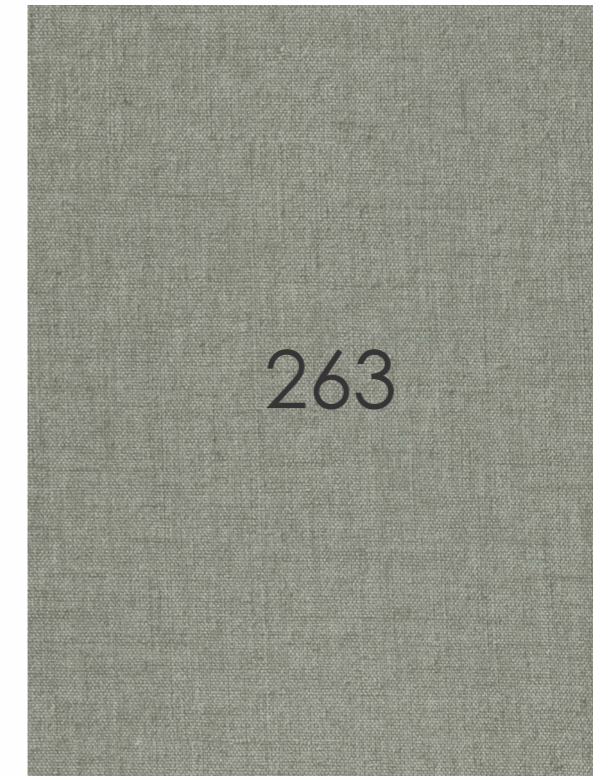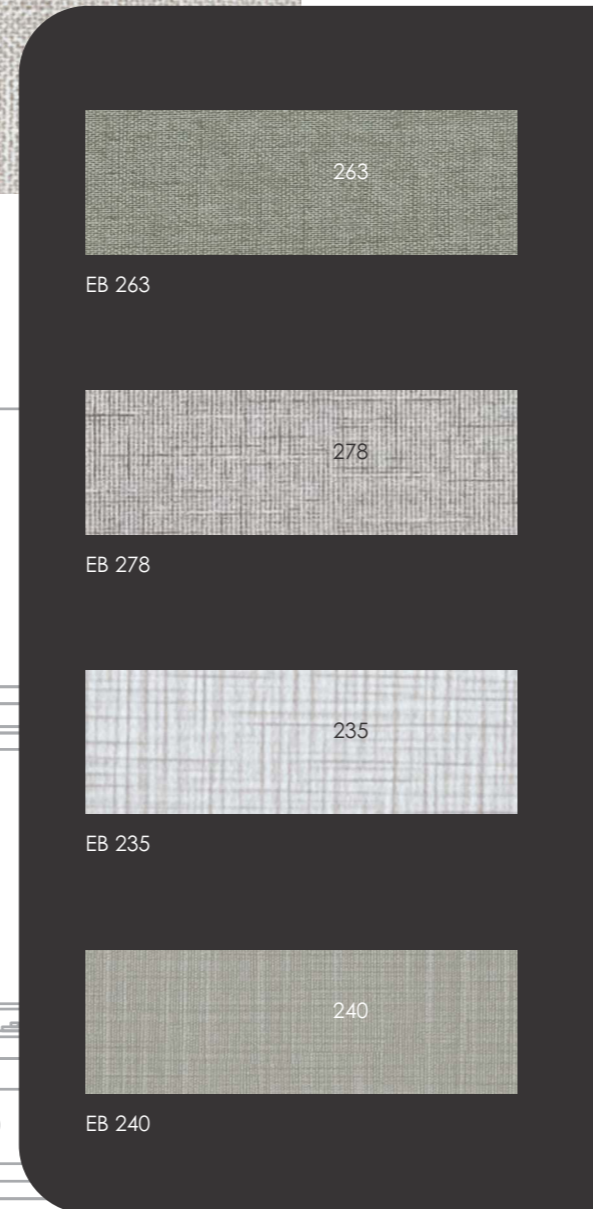

263 SF




278 SF

Enhanced  
fervor




235 SF

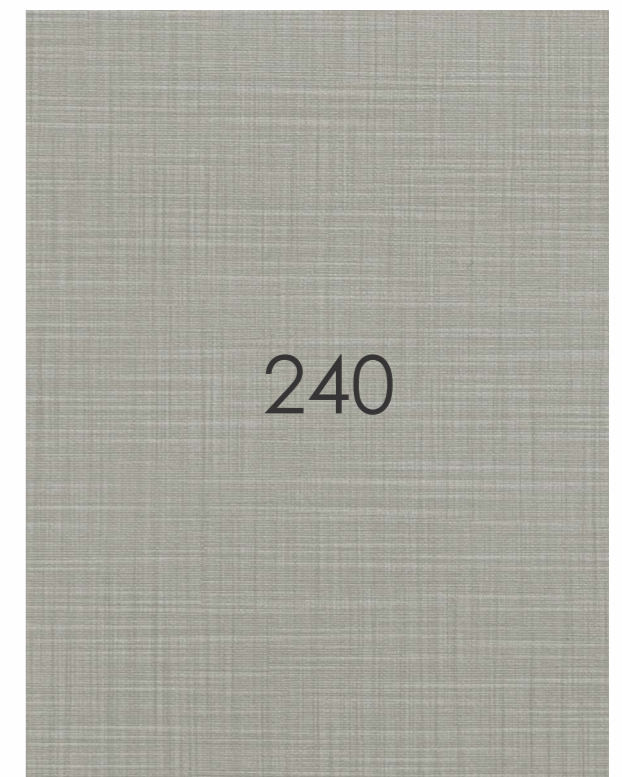


240 SF


# FABRIC

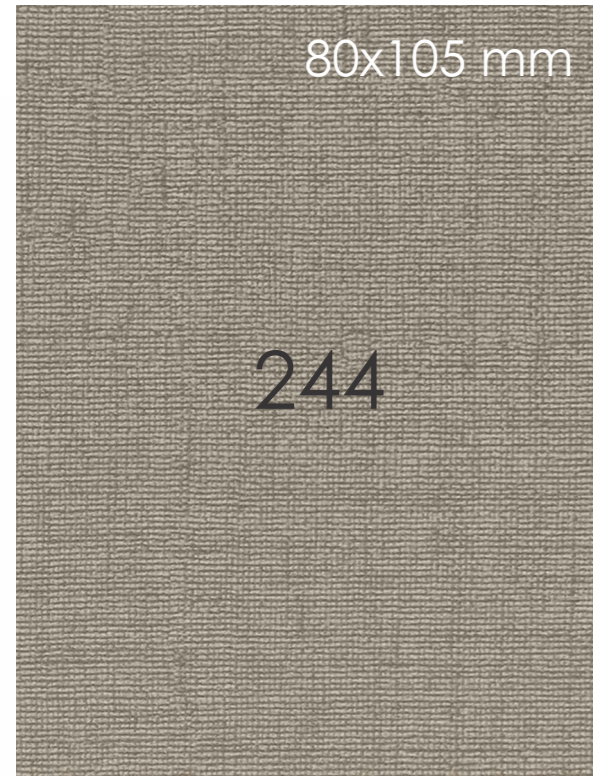

244 SF

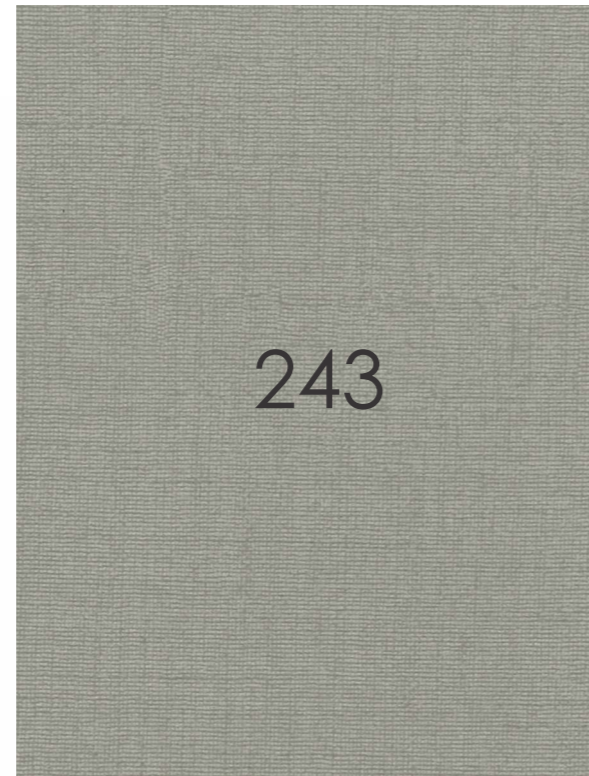


243 SF

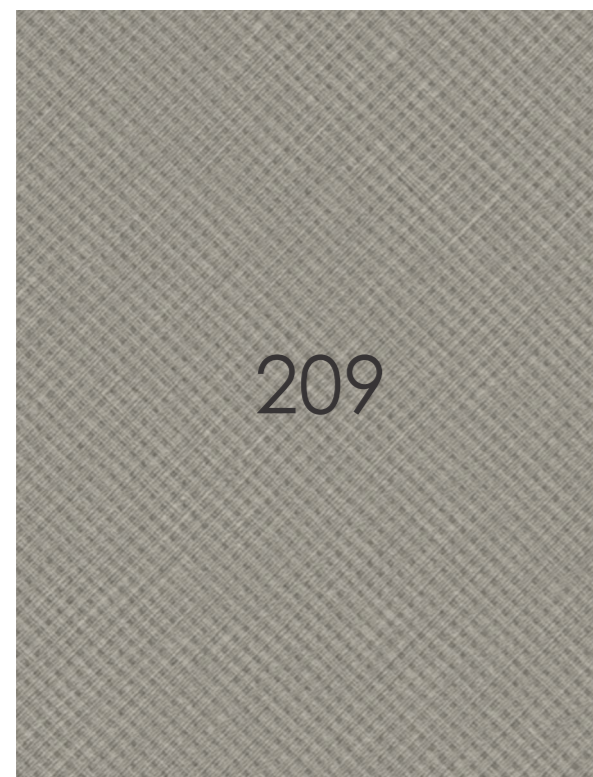


209 SF




206 SF

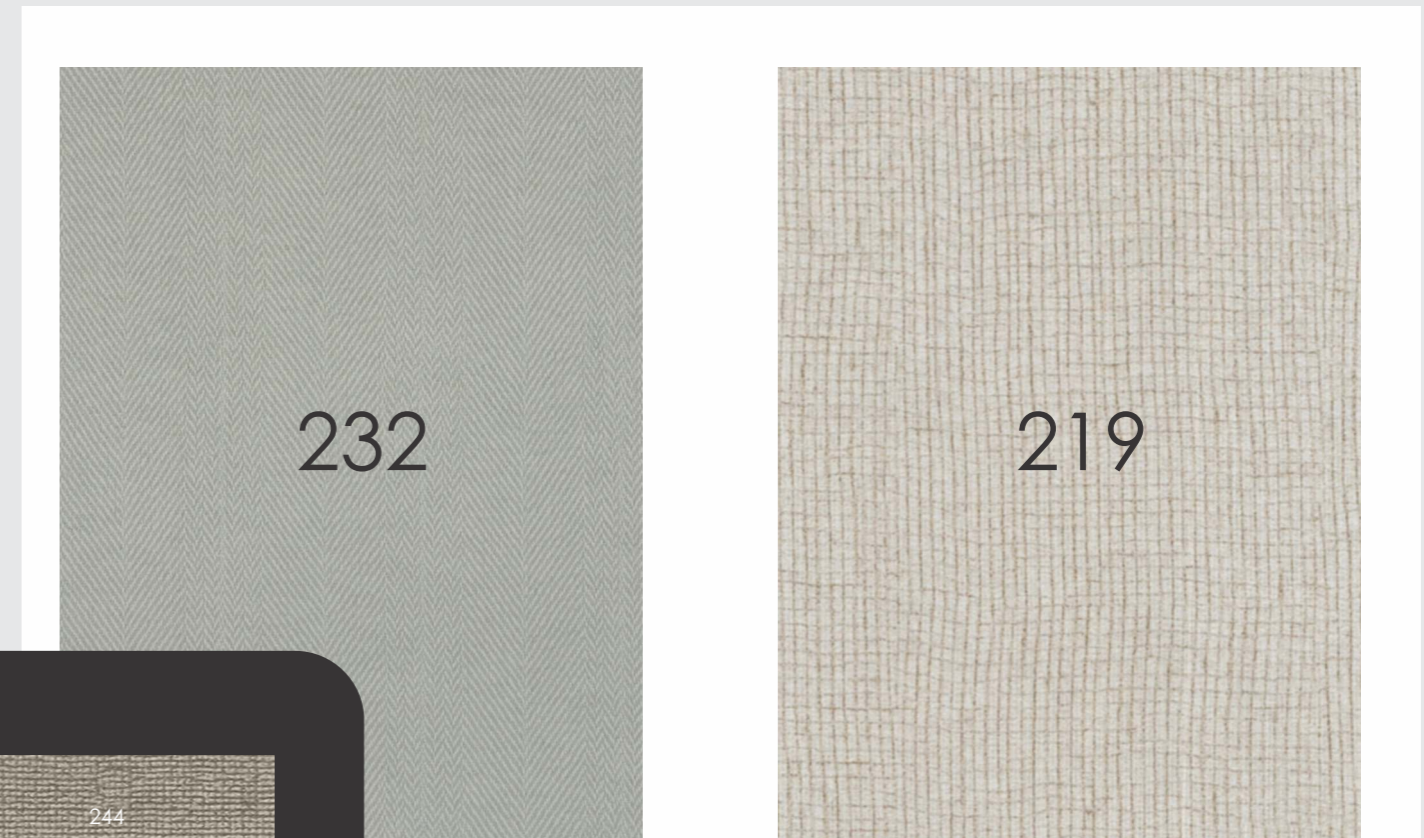


219 SF

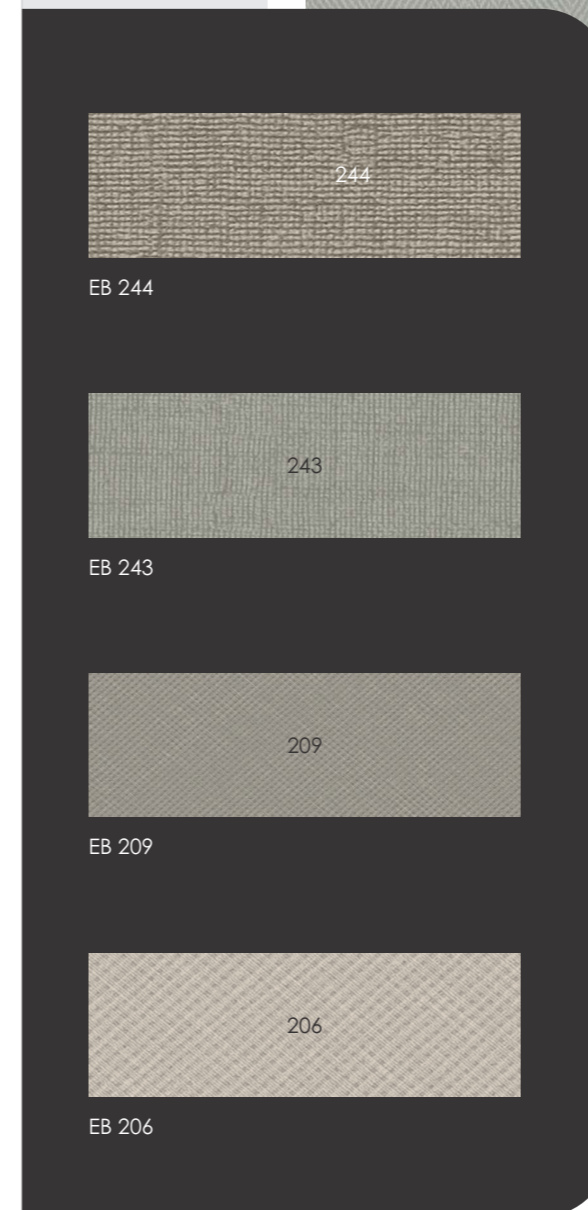


Designed to complement diverse interiors.

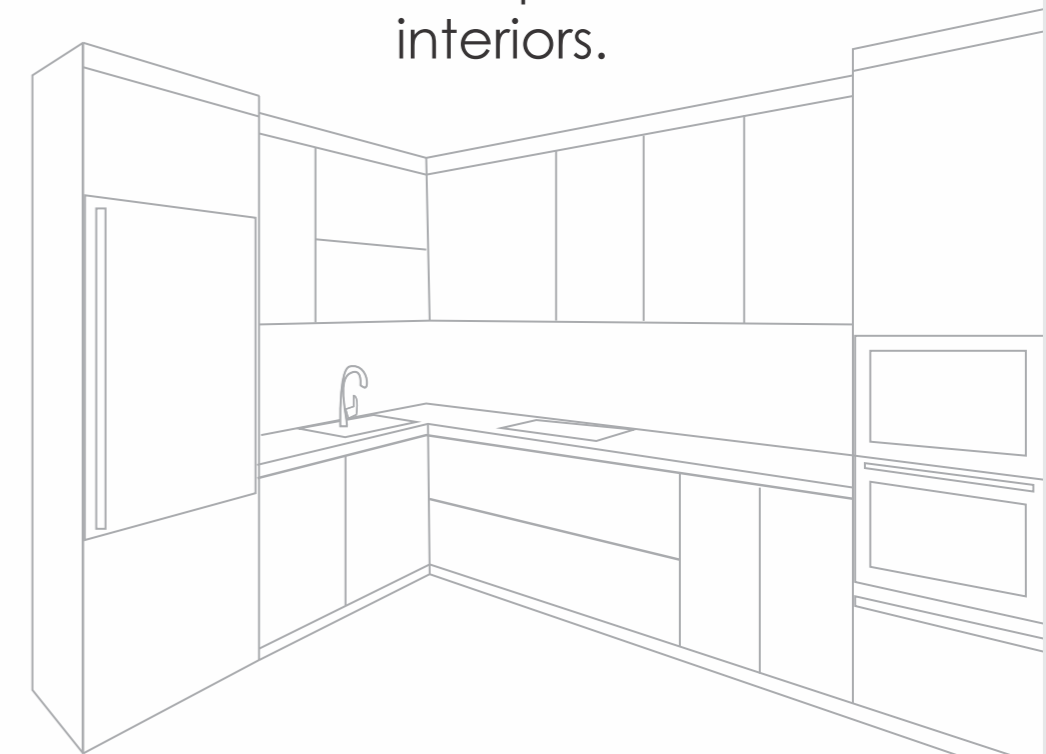


# FABRIC

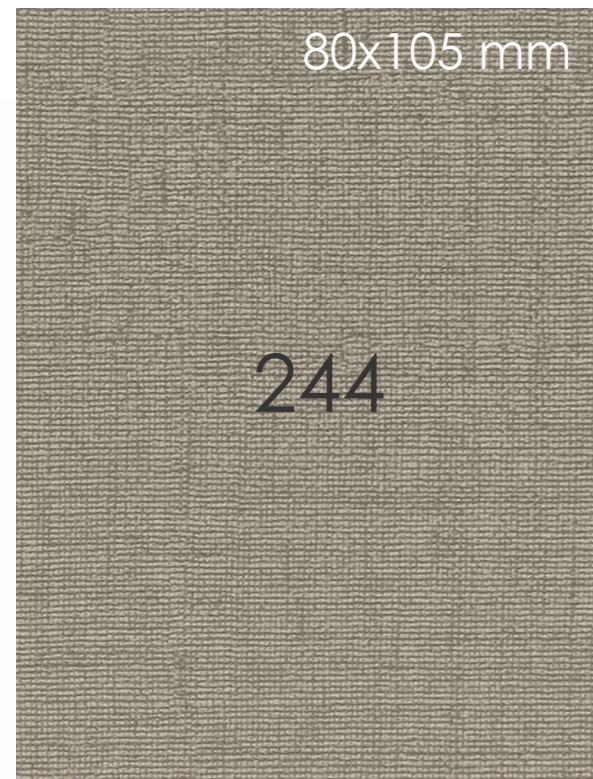

244 SF

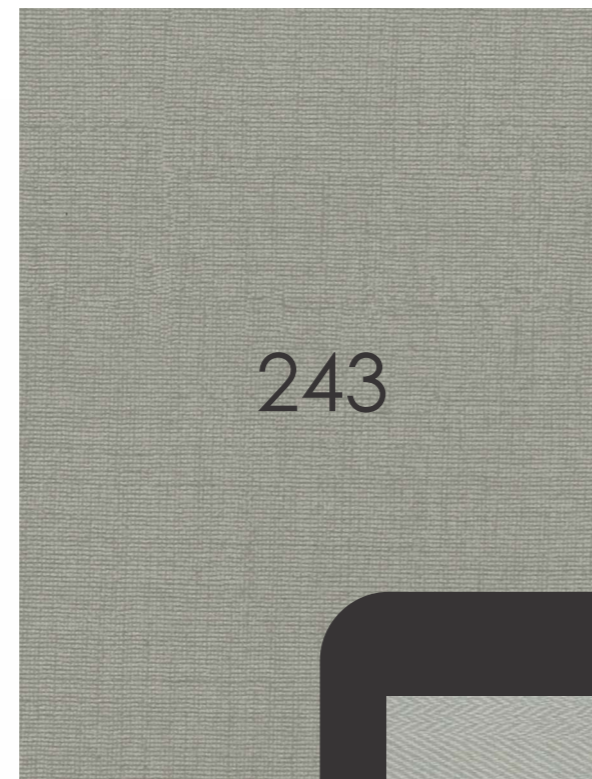

243 SF

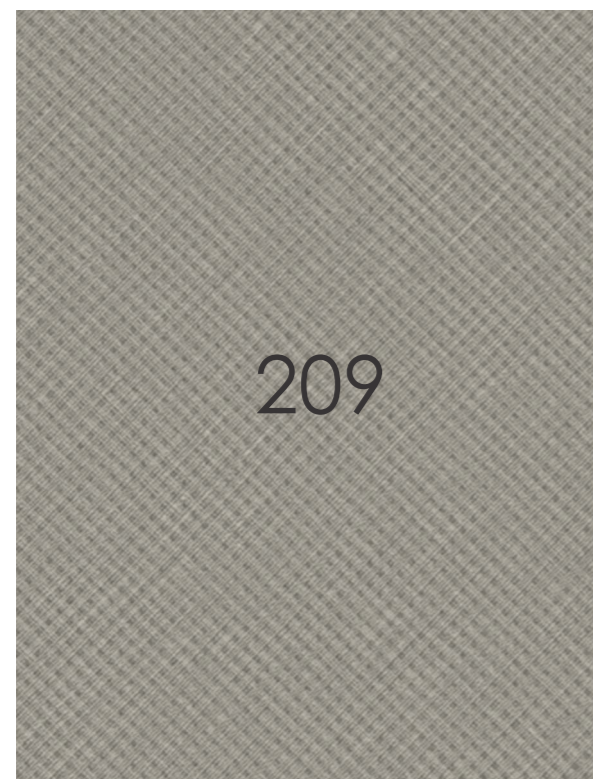

209 SF




206 SF

EB 232

EB 219

## Niche

Textures that elevate interior aesthetics.

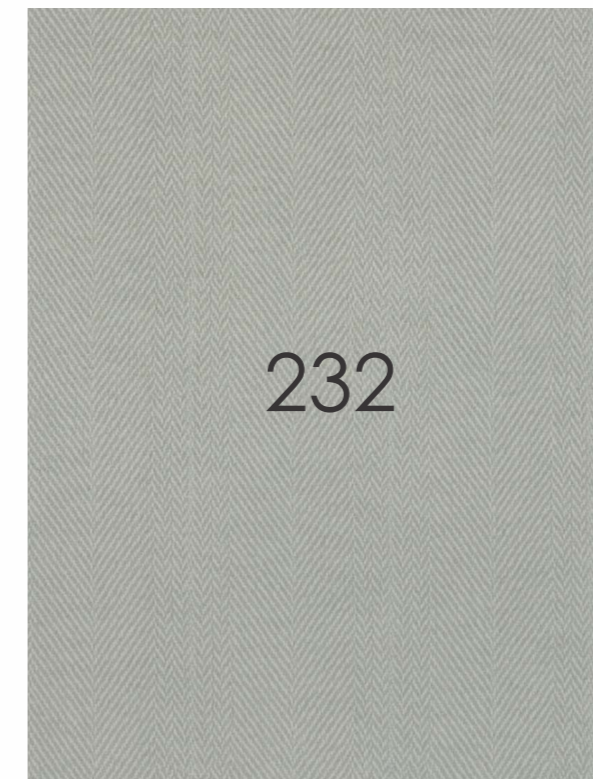


232 SF



219 SF

Designed to complement diverse interiors.

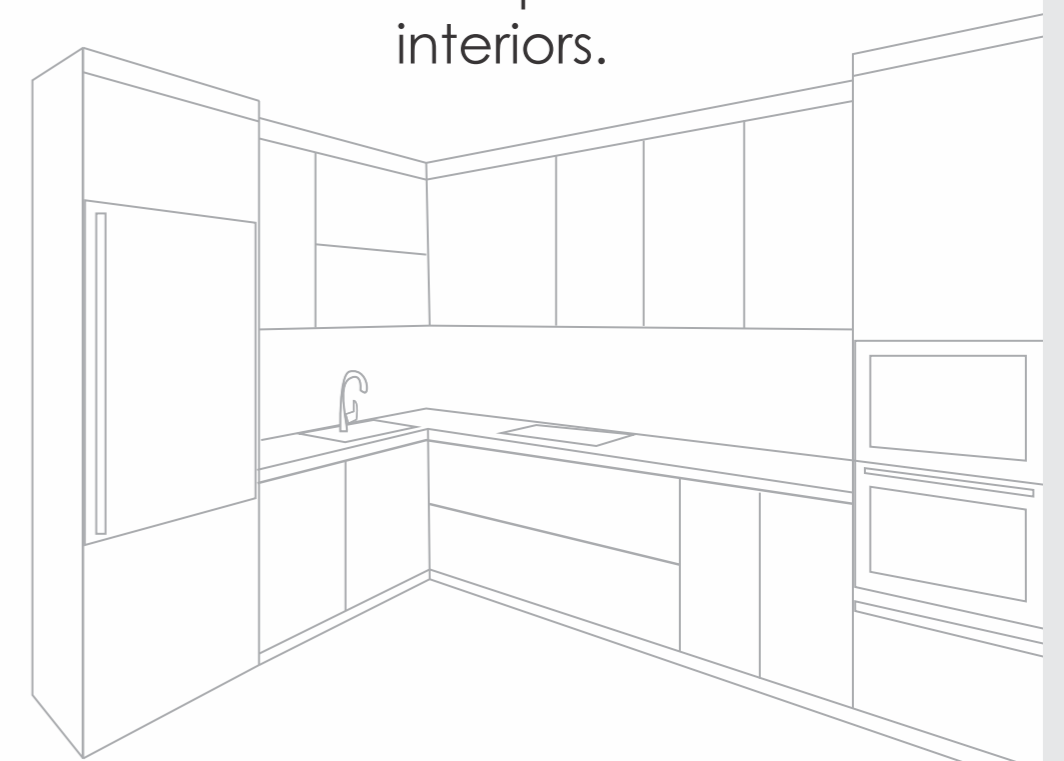

# INDEX

| SR. NO. | DESIGN NO. | EDGE BAND NO. | PG. NO. |
|---------|------------|---------------|---------|
| 1       | 107 LT     | EB 107 LT     | 5       |
| 2       | 107 SF     | EB 107        | 7       |
| 3       | 112 LT     | EB 112 LT     | 4       |
| 4       | 112 SF     | EB 112        | 6       |
| 5       | 122 LT     | EB 122 LT     | 5       |
| 6       | 122 SF     | EB 122        | 7       |
| 7       | 123 LT     | EB 123 LT     | 4       |
| 8       | 123 SF     | EB 123        | 6       |
| 9       | 124 LT     | EB 124 LT     | 5       |
| 10      | 124 SF     | EB 124        | 7       |
| 11      | 128 LT     | EB 128 LT     | 5       |
| 12      | 128 SF     | EB 128        | 7       |
| 13      | 136 LT     | EB 136 LT     | 4       |
| 14      | 136 SF     | EB 136        | 6       |
| 15      | 198 LT     | EB 198 LT     | 4       |
| 16      | 198 SF     | EB 198        | 6       |
| 17      | 206 SF     | EB 206        | 20      |
| 18      | 209 SF     | EB 209        | 20      |
| 19      | 210 SF     | EB 210        | 10      |
| 20      | 211 SF     | EB 211        | 11      |
| 21      | 213 SF     | EB 213        | 11      |
| 22      | 214 SF     | EB 214        | 13      |
| 23      | 218 SF     | EB 218        | 14      |
| 24      | 219 SF     | EB 219        | 21      |
| 25      | 232 SF     | EB 232        | 21      |
| 26      | 235 SF     | EB 235        | 19      |
| 27      | 236 SF     | EB 236        | 18      |
| 28      | 240 SF     | EB 240        | 19      |
| 29      | 243 SF     | EB 243        | 20      |
| 30      | 244 SF     | EB 244        | 20      |
| 31      | 263 SF     | EB 263        | 19      |
| 32      | 266 SF     | EB 266        | 18      |
| 33      | 267 SF     | EB 267        | 13      |
| 34      | 278 SF     | EB 278        | 19      |
| 35      | 966 SF     | EB 966        | 15      |
| 36      | 985 SF     | EB 985        | 15      |
| 37      | 993 SF     | EB 993        | 12      |

# TECHNICAL SPECIFICATION

| Sr. No. | Properties  | Unit       | Specified Value                           | ONELINE Test Result |
|---------|---|------------|---|---------------------|
| 1       | Classification  |            | HGS (Horizontal General Purpose Standard) |                     |
| 2       | Length & Width of Panel   | mm         | +10/-00 mm                                | Complies            |
| 3       | Straightness of Edges   | mm/m       | 1.50 (max.)                               | Complies            |
| 4       | Squareness  | mm/m       | 1.50 (max.)                               | Complies            |
| 5       | Resistance to Surface Wear  | Revolution | 350 (min.)                                | >350                |
| 6       | Resistance to Immersion in Boiling Water                                    |            |   |                     |
|         | a. Mass Increase  | %          | 11.50 (max.)                              | 8.80                |
|         | b. Thickness  | %          | 13.50 (max.)                              | 9.50                |
|         | c. Appearance   | Grade      | Not worse than 4                          | 4                   |
| 7       | Resistance to Dry Heat at 180° C  |            |   |                     |
|         | a. Gloss Finish   | Grade      | Not worse than 3                          | 3                   |
|         | b. Other Finish   | Grade      | Not worse than 4                          | 4                   |
| 8       | Dimensional Stability at Elevated Temperature                               |            |   |                     |
|         | a. Longitudinal   | %          | 0.60 (max.)                               | 0.50                |
|         | b. Transverse   | %          | 1.10 (max.)                               | 0.95                |
| 9       | Dimensional Stability at 20°C Temperature                                   |            |   |                     |
|         | a. Longitudinal   | %          | 0.43 (max.)                               | 0.35                |
|         | b. Transverse   | %          | 0.68 (max.)                               | 0.50                |
| 10      | Resistance to Impact by Small Diameter Ball                                 |            |   |                     |
|         | a. Spring Force   | N          | 20 (min.)                                 | 25                  |
| 11      | Resistance to Cracking (thin laminates)                                     | Grade      | Not worse than 4                          | 4                   |
| 12      | Resistance to Scratching  | N          | 2.0 (min.)                                | 2.4                 |
| 13      | Resistance to Staining  |            |   |                     |
|         | a. Group 1 & 2  | Grade      | 5   | 5                   |
|         | b. Group 3 & 4  | Grade      | 4   | 4                   |
| 14      | Resistance to Colour Change in Xenon Arc Lamp (In Exterior Grade HPDL Only) | Grade      | Not worse than 2                          | 6                   |
| 15      | Resistance to Cigarette Burns   | Grade      | Not worse than 3                          | 4                   |
| 16      | Resistance to Steam   | Grade      | Not worse than 4                          | 5                   |

## INSTALLATION, CARE AND MAINTENANCE GUIDELINES

**Storage & Carrying :** Store the sheets horizontally with their face turned down. Place a thick hard board on top of the laminates to protect them from any kind of damage. Stock the laminates in such a way that older sheets will be used first. Store the laminates in a dry place to protect them from moisture. They should also be stored in such away that they don't come in contact with the floor or walls. Always carry the sheets vertically. Don't slide the sheets, lift them while moving them from one place to another. Ideally 2 people should carry one sheet to avoid carelessness that can damage the surface

**Abrasives :** Abrasive pads, scouring powders or cleansers can permanently damage the laminates making them more susceptible to staining.

**Hot Objects :** Even though the laminates have high heat resistance, exposure to temperatures greater than 135°C is not recommended. Do not place hot frying pans or dishes directly from the oven or cooktop on the laminate surface. As a



precaution, use a trivet or insulated pad to protect the surface from heat generating appliances such as pressing irons, toasters, curling irons and electric cookers. Prolonged exposure to temperatures above 65°C may result in separation of the laminate from the substrate.

**Sharp Objects :** Never use knives or other sharp objects directly on the decorative surface. Use a chopping block or counter saver to protect the laminates.

**Impact :** The laminates have excellent impact resistance. However, dropping heavy objects or deliberately hammering directly on the surface may cause chipping or cracking.

**Harsh chemicals :** Harsh chemicals such as oven cleaners, toilet cleaners, or drain cleaners will etch and discolor the decorative surface. The laminates are not designed to resist continual contact with these chemicals. If any of these products spill over the surface, remove immediately, rinse thoroughly, and wipe dry.

**Pasting Instructions :** Please remove moisture before application from surface between laminate and plywood. Avoid using Adhesive mix with water. Avoid pasting in humid Weather.



Avoid direct sunlight / continuous light. This may cause color fading.



-----  
Cutting a laminate sheet at an angle of 90 degree leads to development of cracks in corner after pasting. Therefore it is advisable to avoid cutting at an angle of 90 degrees.



-----  
No claim will be entertained for air bubbles